





## Model FL-21 Current Divider Peripheral




5~125A

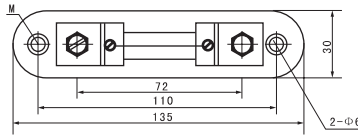

150~200A

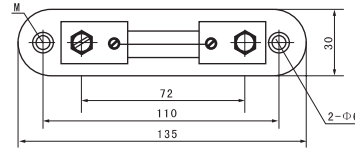


250~600A

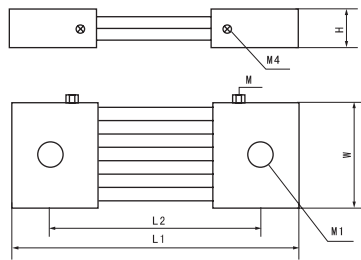


TYPE 50mV	250A	300A	400A	500A	600A
L1	116	116	116	116	122
L2	86	86	86	86	90
W	41	35	44	55	55
H	12	18.5	18.5	18.5	21
M	4	4	4	4	4
M1	13	13	13	13	13
Kg	0.31	0.37	0.49	0.61	0.77




800~1500A

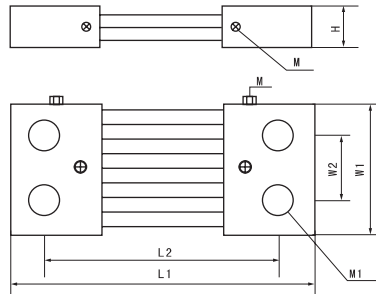


TYPE 50mV	800A	1000A	1200A	1500A
L1	122	159	161	159
L2	90	121	123	121
W1	70	70	85	100
W2	35	35	45	49
H	21	21	21	21
M	4	4	4	4
M1	17	17	17	17
Kg	0.97	1.4	1.7	2.3




2000~2500A

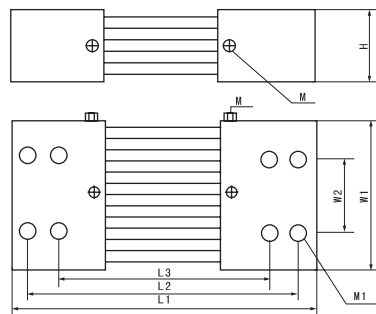

TYPE 50mV	2000A	2500A
L1	190	190
L2	165	165
L3	89	89
W1	100	110
W2	50	55
H	38	38
M	4	4
M1	17	17
Kg	4.7	5.3

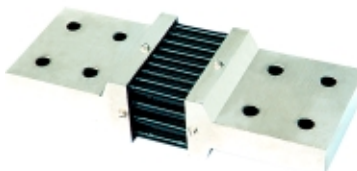

3000~6000A

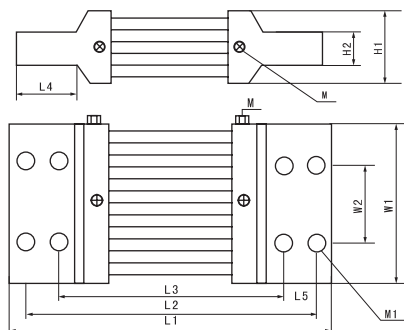

TYPE 50mV	3000A	4000A	5000A	6000A
L1	273	292	315	327
L2	232	253	271	283
L3	142	153	163	185
L4	90	97	100	108
L5	45	50	54	55
W1	103	110	128	133
W2	55	55	60	65
H1	64	82	106	115
H2	28	34	41	48
M	4	4	4	4
M1	17	17	17	17
Kg	7	9.5	15	19.2